



Palm Treo 700P Back Case Replacement

This Guide will illustrate how to remove the back case of your Palm Treo 700P.

Written By: James Smith





TOOLS:

- [Spudger](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Press the button located just above the Sprint™ logo then slide the cover down.

Step 2



- Use the small notch on the left hand side of the phone to remove the battery.

Step 3 — Back Case



- Remove the stylus from the phone.

Step 4



- After removing the battery and stylus, unscrew the 5 Torx screws (using a T-5 Torx screw driver)

Step 5




- Using the spudger, remove the small rubberized patch under the antenna.

Step 6



- Unscrew the last two screws using the previous screw driver.

Step 7

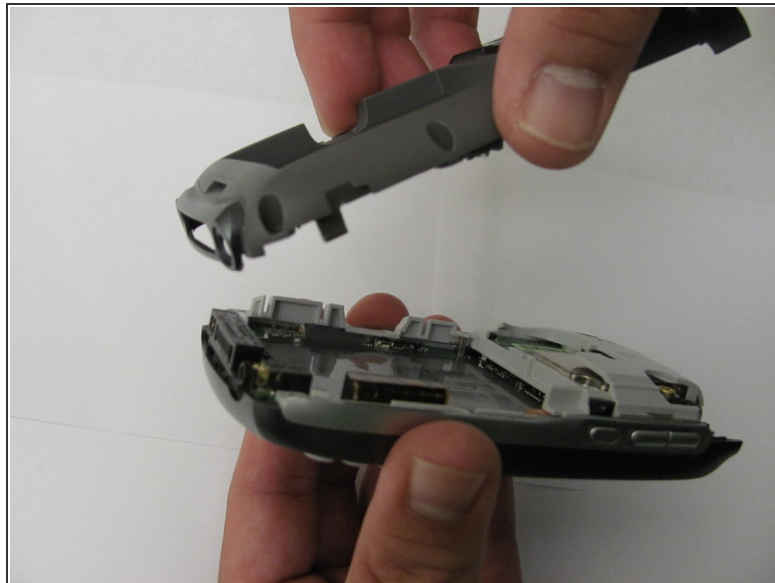

- Using the plastic opening tool, gently separate the back case from the phone body.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 10:54:28 PM.